



PTY-20

STRAINERS

GENERAL FEATURES

AYVAZ Y Type Strainers have a wide range of applications to filter out foreign materials in pipelines. PTY-20 Y Type Strainer is designed for long-lasting and healthy operation of many equipment in the system.




Fluids like liquids, gases and vapors transmitted in the systems lead some undesirable substances. These foreign materials can be seen in the form of rust, lime, welding slag. These materials can damage the armatures on the system. To protect these armatures in the system, a strainer should be used in front of each fixture.

Application Areas:

- Steam, water, compressed air, gas, oil and chemical fluids
- They are used to protect the armatures by filtering foreign materials in the system. It must be used before sensitive equipment such as pressure reducing valve, steam meter, control valves, steam trap.

Body and Cover	: GG.25 Cast Iron
Filter	: AISI 304 Stainless Steel
Gasket	: Graphite
Bolt	: 5.6
Max. Working Temp.	: 180 °C
Max. Working Pressure	: 16 bar

PTY-20 STRAINERS

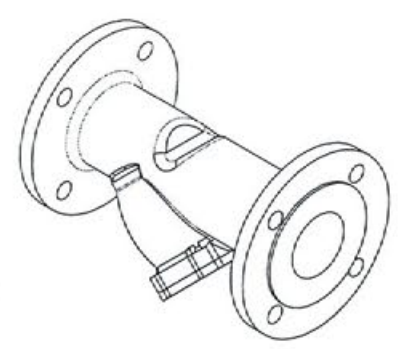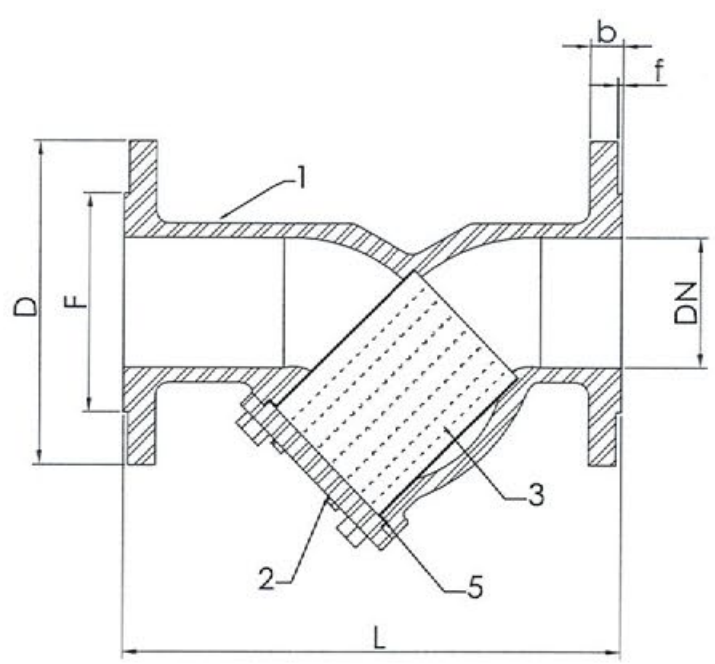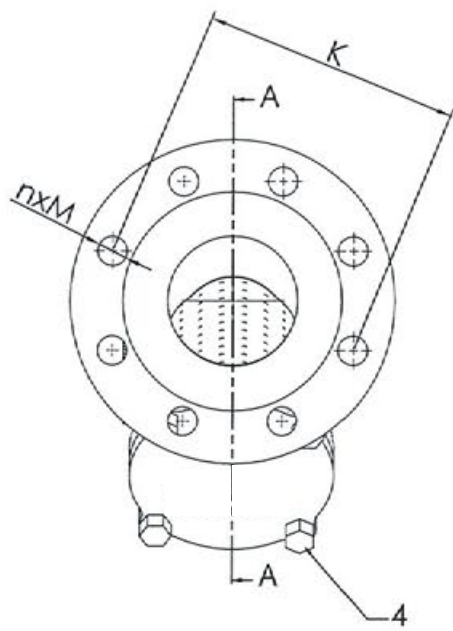


No	Part	Material
1	Body	GG25 Cast Iron
2	Cover	GG25 Cast Iron
3	Filter	AISI 304 Stainless Steel
4	Bolt	5.6
5	Gasket	Graphite


DN(mm)	D	K	F	L	f	b	nxM
15	95	65	46	130	2	14	4x14
20	105	75	56	150	2	16	4x14
25	115	85	65	160	2	16	4x14
32	140	100	76	180	2	18	4x19
40	150	110	84	200	3	18	4x19
50	165	125	99	230	3	20	4x19
65	185	145	118	290	3	20	4x19
80	200	160	130	310	3	22	8x19
100	220	180	156	350	3	24	8x19
125	250	210	184	400	3	26	8x19
150	285	240	211	480	3	26	8x23
200	340	295	266	600	3	30	12x23
250	405	355	319	730	3	32	12x28
300	460	410	370	830	3	32	12x28

PTY-20 STRAINERS

50mm–150mm

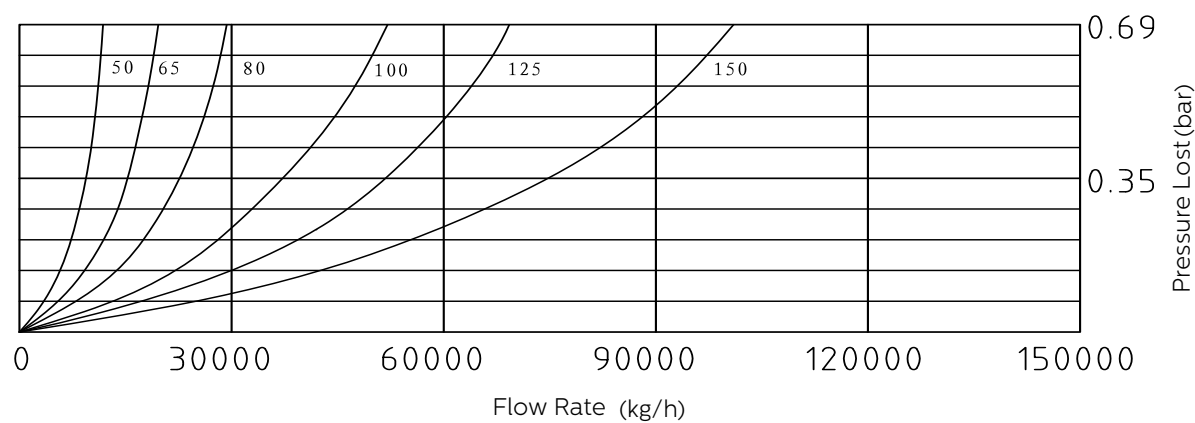


200mm–300mm

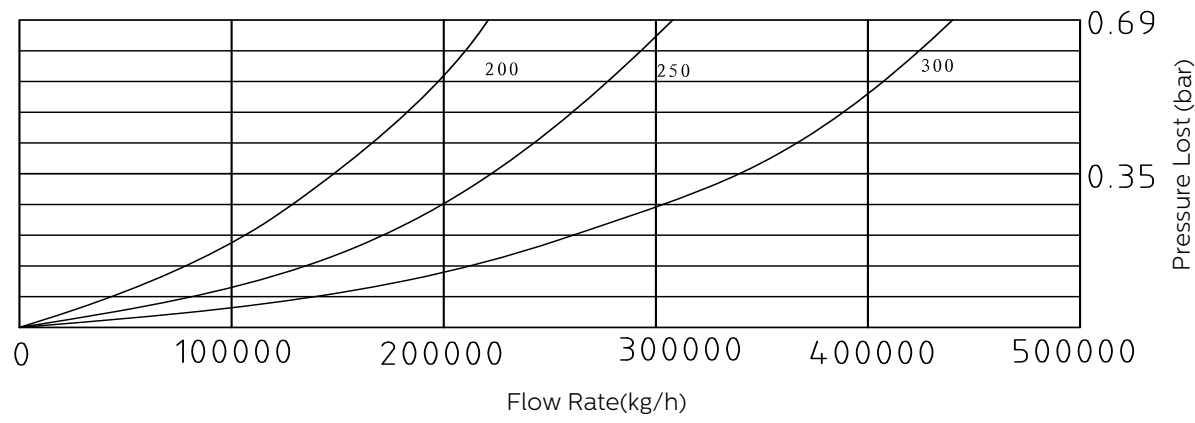


1 gpm : 0,00378 m³
1 psi : 0,006895 bar
1 bar : 100 kpa

PTY-20 STRAINERS

INSTALLATION

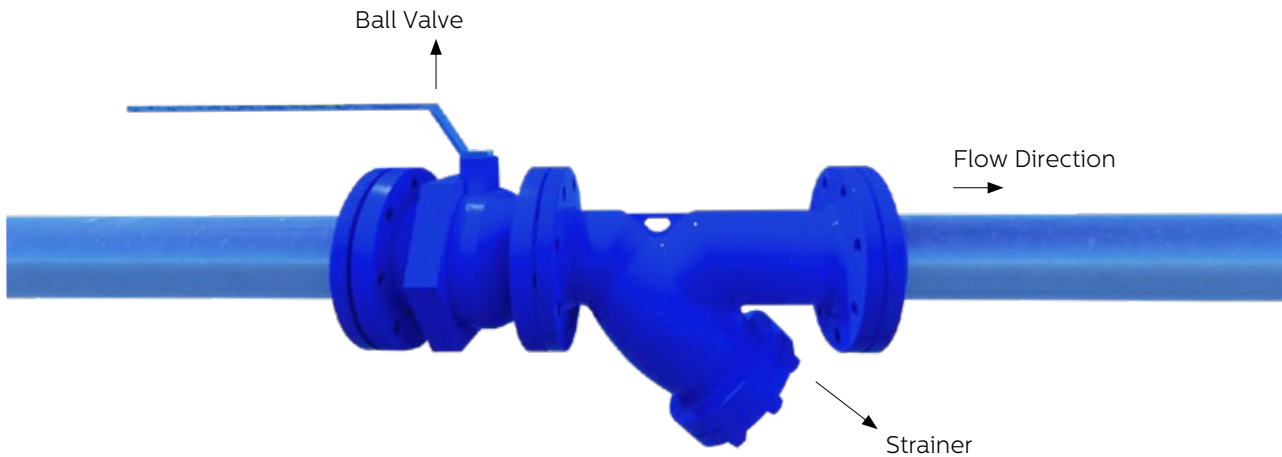

-It should install as seen above in cold water, hot water and similar fluids.

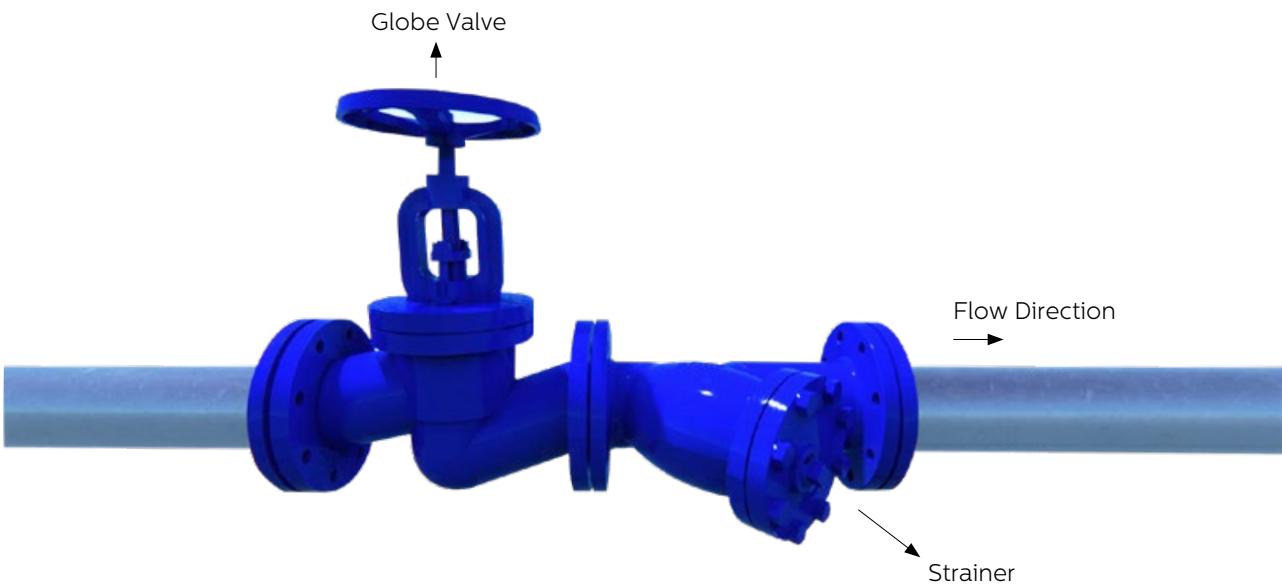

-The direction of the strainer on the steam lines should be horizontal as shown. If it is placed vertically, because of the condensation there will be condensate and that causes water hammer.



HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa 'nan Caddesi No: 44 Arnavutköy - ISTANBUL
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27
info@ayvaz.com | www.ayvaz.com

Cona
Caserta/Italy
Tel: +39 0823 187 3988
rmolaro@ayvaz.com

Ayvaz Russia
Moscow/Russia
Tel: +74959951728
ayvazrus@ayvaz.com

Ayvaz Germany
Viernheim/Germany
Tel: +49 62046014399
germany@ayvaz.com

Ayvaz Ukraine
Kiev/Ukraine
Tel: +380 44 390 57 57
info@ayvaz.com.ua

Tricorr
Warsaw/Poland
Tel: +48-32-783-295-1
tricorr@tricorr.eu

Haci Ayvaz M.E.
Dubai/U.A.E
Tel: +971 563550822
+971 501306871
mideast@ayvaz.com

Ayvaz China
Cixi City/China
Tel: +86 0574 5897 3851
info@ayvazchina.com

Ayvaz Kazakhstan LLP
Almaty/Kazakhstan
Tel: +7 (727) 327 97 57
info_kz@ayvaz.com
www.ayvaz.kz

Ayvaz N
Isperih/Bulgaria
Tel: +359 8431 27 32
office@ayvaz-n.eu

Ayvaz Serbia
Belgrad/Serbia
Tel: +381 61 658 70 52
yakbiyik@ayvaz.com