
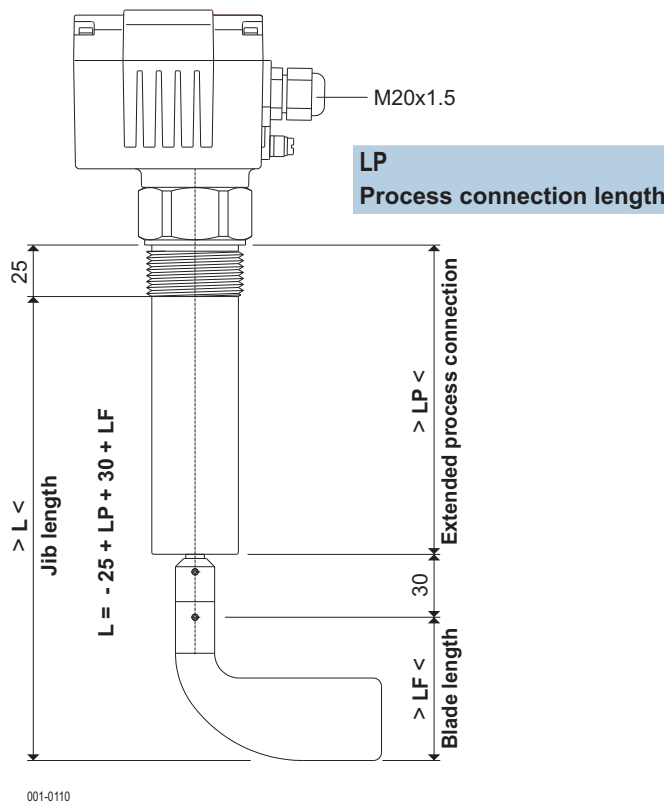


Full, empty and demand indicator
for any mounting position
with extended process connection

Signal contact 2 A / 250V AC potential-free
Type of protection IP66 in accordance with DIN EN 60529
Maintenance none

A1 or A2
Compact housing

Order code
DF22AnCnG3AM2V

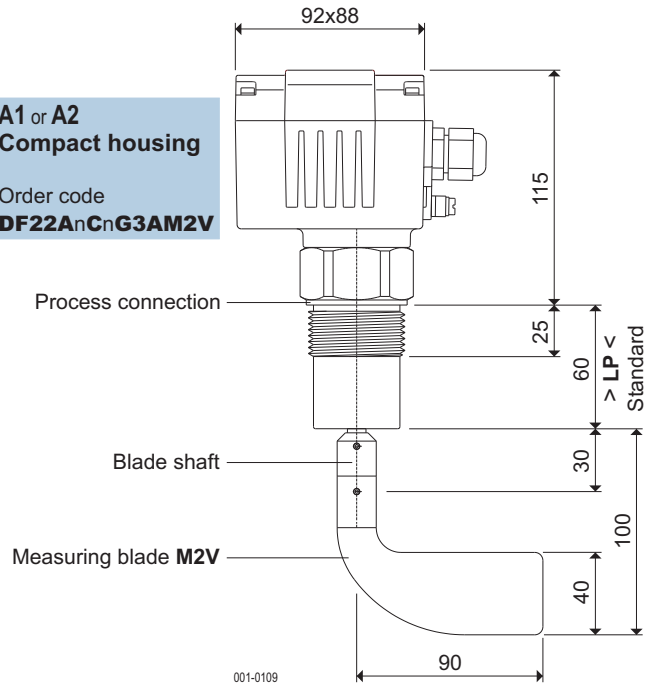

You will find further technical details
under appliance information **DF-GI..**