
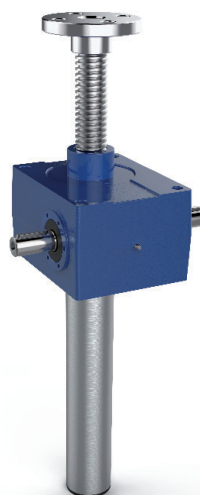
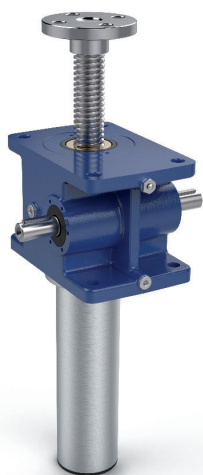


Screw Jacks

[MORE
PRODUCTIVITY,
LESS ENERGY
CONSUMPTION]

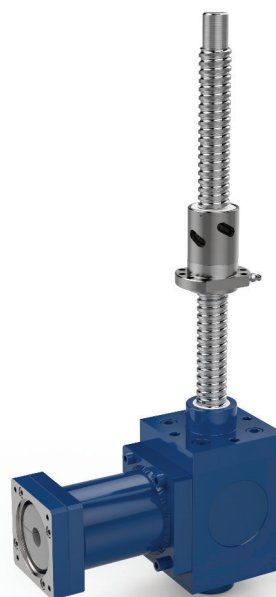

High quality production **100% Made in Servomech**


Acme screw or ball screw drive

Travelling screw (Mod.A) or travelling nut (Mod.B)

Wide range of sizes and options available

MA BS SERIES

High efficiency screw jacks
Suitable for continuous operation (duty cycle up to 100%)
High precision worm gearbox
Gearbox housing shape for a better heat dissipation
Mod.A with travelling screw, Servomech patented design
Mod.B with travelling nut
Ball screw from Ø 16 mm to Ø 100 mm
8 sizes, load capacity from 5 kN to 350 kN
Input speed up to 3000 rpm
Long life synthetic oil lubricated worm gear,
nut relubrication system with grease reserve chamber
Electric limit switches
Incremental or absolute encoder for positioning control
Prepared for AC or brushless servomotors mounting

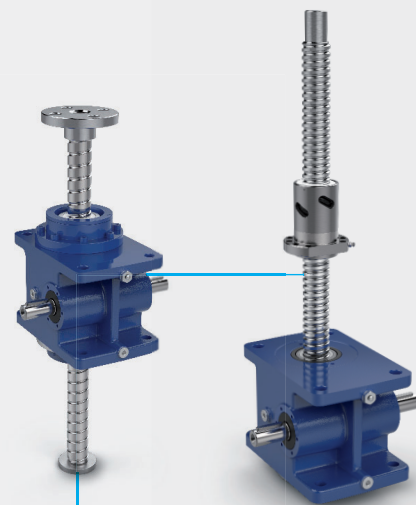

SJ BS SERIES

Suitable for intermittent operation (duty cycle up to 70%)
High precision worm gearbox
Monobloc gearbox housing, robust and compact shape
Mod.B with travelling nut
Ball screw from Ø 16 mm to Ø 140 mm
11 sizes, load capacity from 5 kN to 800 kN
Input speed up to 1500 rpm
Long life synthetic grease lubricated worm gear




HS SERIES

High speed screw jacks
Suitable for continuous operation (duty cycle up to 100%)
Bevel gear, Gleason spiral toothing system,
high efficiency and low noise functioning
Mod.B with travelling nut
Ball screw from Ø 25 mm to Ø 80 mm
6 sizes, load capacity from 10 kN to 200 kN
Input speed up to 3000 rpm
Long life synthetic oil lubricated bevel gear
Incremental or absolute encoder for positioning control
Prepared for AC or brushless servomotors mounting



Acme Screw Jacks

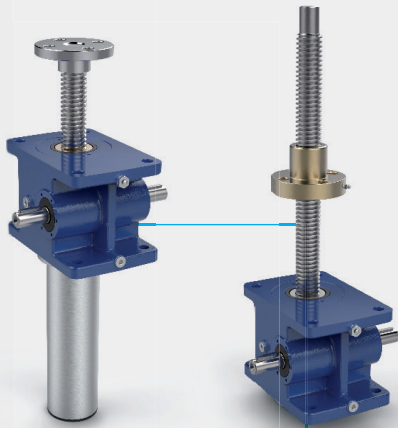


High efficiency screw jacks
Suitable for intermittent operation
High precision worm gearbox
Gearbox housing shape for a better heat dissipation

Mod.A with travelling screw
Mod.B with travelling nut
Acme screw from Ø 18 mm to Ø 100 mm
8 sizes, load capacity from 5 kN to 350 kN
Input speed up to 3000 rpm

Long life synthetic oil lubricated worm gear

Electric limit switches
Incremental or absolute encoder for positioning control
Prepared for AC or brushless servomotors mounting

MA SERIES

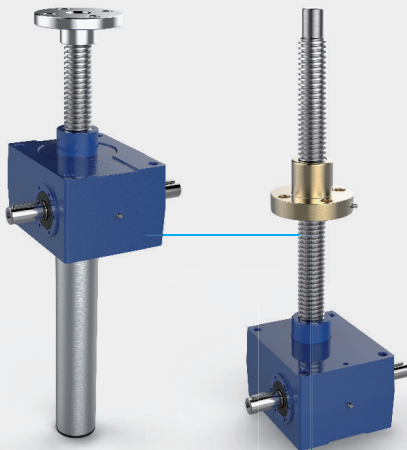


Suitable for intermittent operation
High precision worm gearbox
Monobloc gearbox housing, robust and compact shape

Mod.A with travelling screw
Mod.B with travelling nut
Acme screw from Ø 18 mm to Ø 160 mm
14 sizes, load capacity from 5 kN to 1000 kN
Input speed up to 1500 rpm

Long life synthetic grease lubricated worm gear

SJ SERIES

Bevel gearboxes

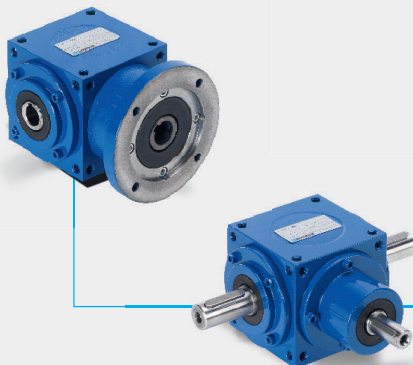

Bevel gearboxes, Gleason spiral toothing system
High efficiency and low noise functioning
Cubic shaped housing with 6 machined sides

6 standard sizes available
Input speed up to 3000 rpm
Modular system with additional outputs available
Long life synthetic oil or grease lubrication
Prepared for AC or brushless servomotors mounting

BG SERIES

In an advanced industrial context, where more and more frequently is required the need for **high speeds** and **continuous operations**, as well as **load and positioning control**, the designers evaluate with great interest solutions with higher performances, easier to control (position, load and speed), and **able to guarantee a competitive advantage in terms of quality and quantity of the work done**.

When the application requires:

- greater performance (LOAD and SPEED),
- continuous operation,
- high precision and repeatability in POSITIONING,
- increased FLEXIBILITY,
- high DYNAMICS conditions,

We suggest the use of Servomech high-performance ball screw jacks, with brushless servomotors and related control drives.




The new generation of lifting systems offered by Servomech allows achieving **high linear speeds**, high dynamic operations with relevant **acceleration and deceleration**, high **positioning accuracy**, exact position repeatability and operations with a continuous duty cycle. The synchronization between the various lifting points is carried out in electrical axis, with the control in position or in both position and torque.

The **new generation of lifting systems achievable with Servomech ball screw jacks** expand the application horizons of lifting systems in general with a modern and advanced approach. Lifting systems can now be used for **continuous operations, for process functions, with also heavy load working cycles, with highly dynamic conditions, high speed, high accuracy and control**.

Among the **main advantages** we recall:

- higher linear speed and greater productivity;
- high positioning precision and repeatability;
- energy savings;
- silent operation;
- greater ease of installation and mounting;
- increased flexibility in case of format change.

The use of **multi-point lifting systems with traditional mechanical synchronization** remains always indicated in applications with medium to low linear speeds, with intermittent operation cycles and prefers the use of acme screw jacks, even if ball screw jacks, oil-lubricated bevel gearboxes, oil-lubricated bevel gearmotors are not excluded.

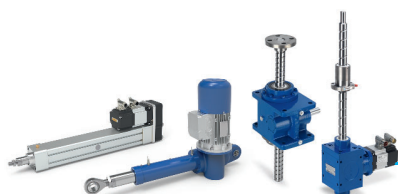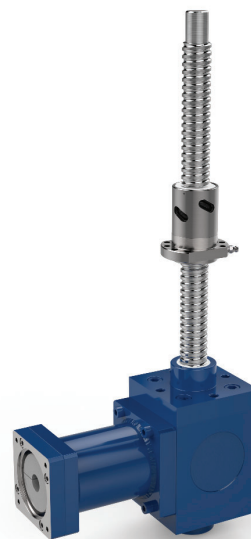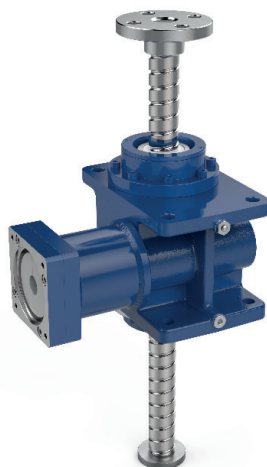

High quality production
100% Made in Servomech

SERVOMECH SpA
Via Calari, 1 • 40011 Anzola dell'Emilia (BO) • Italy

www.servomech.com  

